



# WIFI SETTING GUIDE



### Copyright Declaration

The copyright of this manual belongs to Solax Power Co., Ltd. Any corporation or individual should not plagiarize, partially copy or fully copy it (including software, etc.), and no reproduction or distribution of it in any form or by any means. All rights reserved. Solax Power Co., Ltd. reserves the right of final interpretation. This information is subject to changes without notice.

[www.solaxpower.com](http://www.solaxpower.com)


BespaarPartner B.V. | Roomweg 5 | 8334 NR te Tuk | tel: 0521-764012 | mail: [info@bespaarpartner.nl](mailto:info@bespaarpartner.nl)


Wij zijn aangesloten bij de Nederlandse branche organisatie: Holland Solar

Op alle leveringen/diensten zijn onze algemene voorwaarden van toepassing.

U maakt via uw computer, laptop, tablet of smartphone verbinding met de omvormer.

### Stap 1

Via Windows klikt u eerst op het volgende icoontje, dat rechts onder op uw scherm staat:  Daarna klikt u op netwerk- en internetinstellingen en kiest u voor Wifi. Daarna verschijnt onderstaand beeld (kan bij u afwijken).

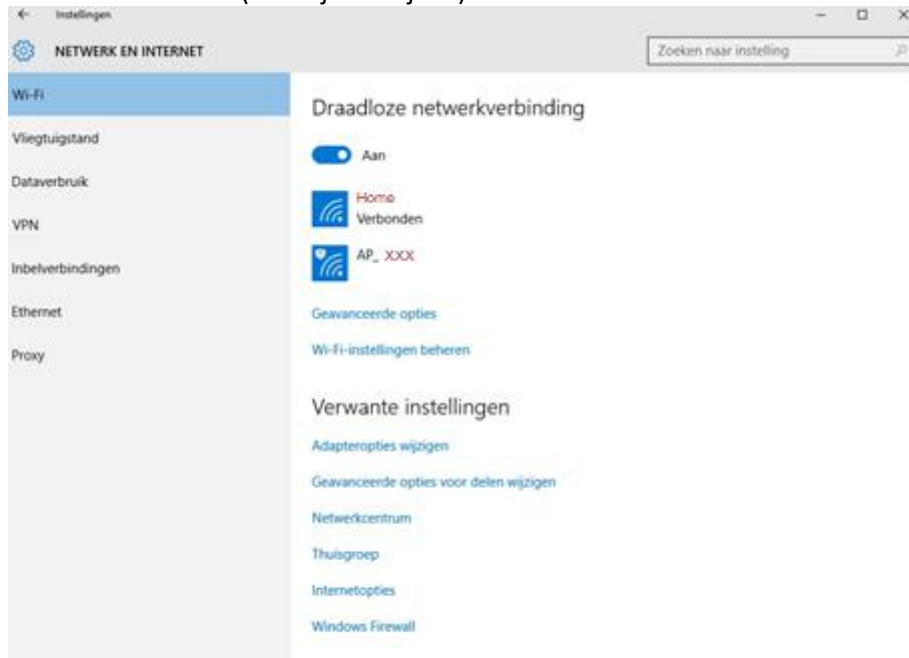


U kunt verbinding maken met uw omvormer door hier te kiezen voor de verbinding die begint met AP. Er zal hier gevraagd worden om een wachtwoord. Deze vindt u aan de zijkant van de omvormer. Hier staat WIFI bij.

**!! na dat u dit gedaan heeft, dient u weer verbinding te maken met uw router (eigen netwerk).**


### Stap 2

Vervolgens gaat u naar de webbrowser. Hier typt u het volgende nummer in: 11.11.11.1 en druk op enter. Nu zal de webpagina vragen om een gebruikersnaam en wachtwoord. In beide vensters kunt u **admin** invullen.

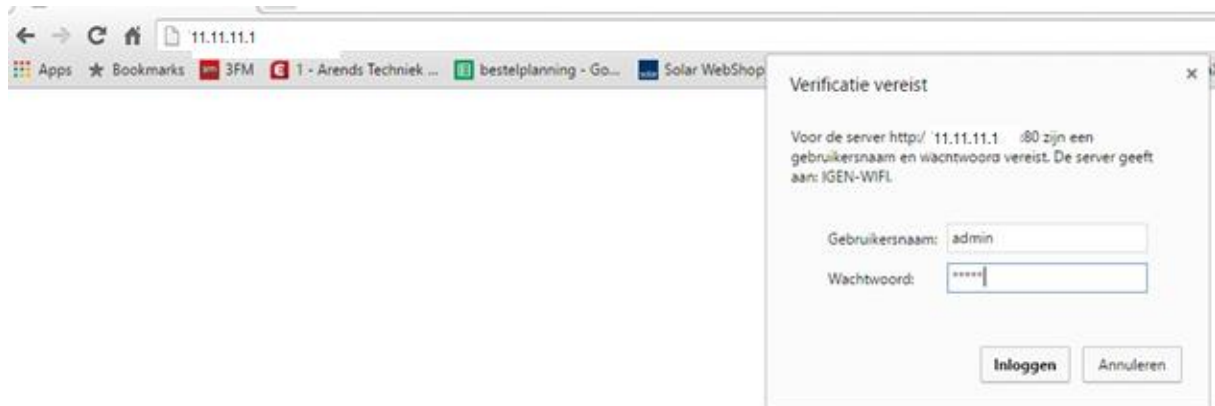

### Stap 3

In het beginscherm klikt u op **wizard**

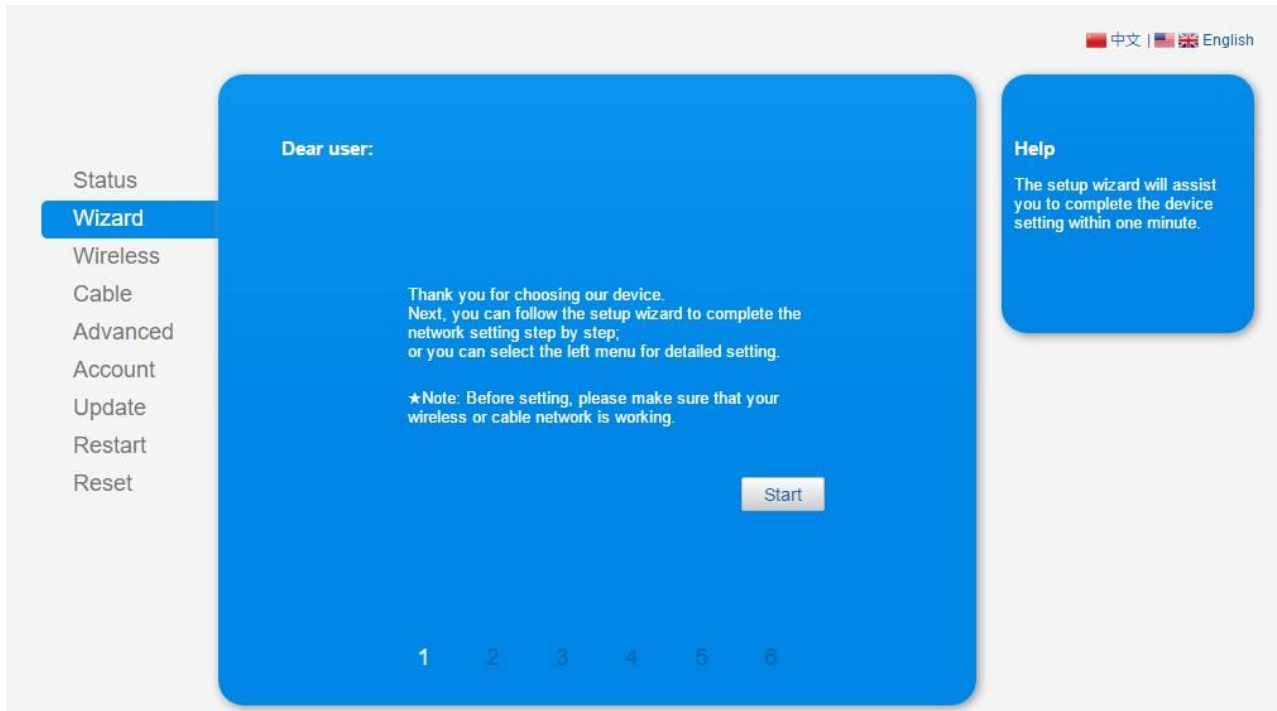


### Stap 4

Klik nu op **start** om de installatie te laten beginnen

### Stap 5

Wanneer de installatie voltooit is, klikt op **next**

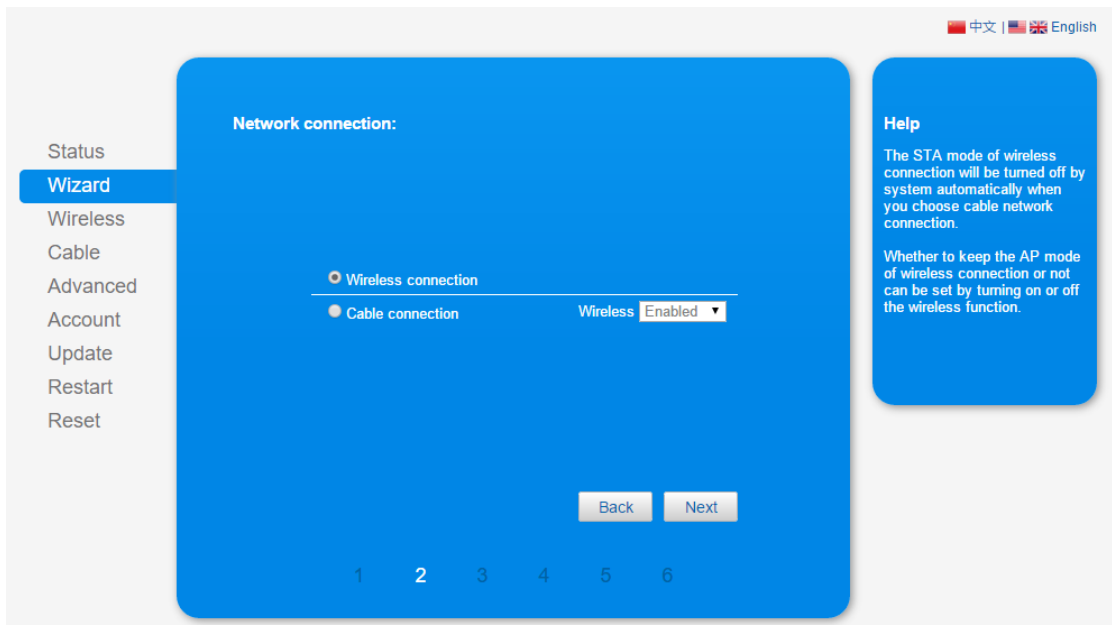

## Stap 6

Vanaf dat moment gaat de SolaX omvormer opzoek naar de netwerken in uw omgeving. Als het bereik goed genoeg is, ziet u uw Wifi netwerk in de lijst verschijnen.

U klikt op uw **netwerk** naam en daarna klikt u op **next**. (U gaat dus verbinding maken met uw eigen netwerk)

The screenshot shows a web interface for selecting a wireless network. On the left is a navigation menu with 'Wizard' selected. The main area is titled 'Please select your current wireless network:' and contains a 'Site Survey' table. Below the table is a note about RSSI and a 'Refresh' button. At the bottom, there is a section for 'Add wireless network manually:' with input fields for network name, encryption method, and encryption algorithm, and 'Back' and 'Next' buttons. A progress bar at the bottom shows 6 steps, with step 3 highlighted.

SSID	BSSID	RSSI	Channel
XXXXX	00:50:71:4b:37:48	76%	5
Home	00:1d:aa:cc:8e:e0	81%	5
Tjeerdama-Wlan	00:50:71:15:bb:00	0%	11

\*Note: When RSSI of the selected WiFi network is lower than 15%, the connection may be unstable, please select other available network or shorten the distance between the device and router.

Refresh

Add wireless network manually:

Network name (SSID)  
(Note: case sensitive)

Encryption method

Encryption algorithm

Back Next

1 2 3 4 5 6

## Stap 7

Daarna vult u uw eigen wachtwoord van uw Wifi netwerk in. Na dat u twee keer uw wachtwoord heeft ingevoerd, klikt u op **next**

The screenshot shows a web interface for entering the wireless network password. On the left is a navigation menu with 'Wizard' selected. The main area is titled 'Please enter the wireless network password:' and contains two password input fields, a 'Show Password' checkbox, and 'Back' and 'Next' buttons. A progress bar at the bottom shows 6 steps, with step 4 highlighted. There is also a 'Help' box on the right and language selection options at the top right.

中文 | English

Please enter the wireless network password:

Password (8-64 bytes)  
(Note: case sensitive)

Re-enter password

Show Password

Back Next

1 2 3 4 5 6

Ver:1.0.03

Help  
Please make sure you have entered the correct password.

## Stap 8

Wanneer u het wachtwoord goed heeft ingevuld komt u bij het volgende scherm. Hier hoeft u verder niks in te vullen. U hoeft alleen maar op **next** te klikken.

Please fill in the following information:

Obtain an IP address automatically	Enable ▾
IP address	0.0.0.0
Subnet mask	0.0.0.0
Gateway address	0.0.0.0
DNS server address	

Back Next

1 2 3 4 5 6

Help  
Most systems support the function of DHCP to obtain IP address automatically. Please select disable and add it manually if your router does not support such function.

中文 | English

## Stap 9

Op het scherm die na stap 8 tevoorschijn komt, klikt u op **ok**.

Setting complete!

Click OK, the settings will take effect and the system will restart immediately.

If you leave this interface without clicking OK, the settings will be ineffective.

Back OK

1 2 3 4 5 6


Help  
After clicking OK, the system will restart immediately.

中文 | English

## Stap 10

De omvormer zal zichzelf nu intern uitzetten en opnieuw opstarten. Vanaf dat moment moet de verbinding weer hersteld zijn. Dit kan 15 tot 40 minuten duren.

## Heb ik nu weer verbinding?

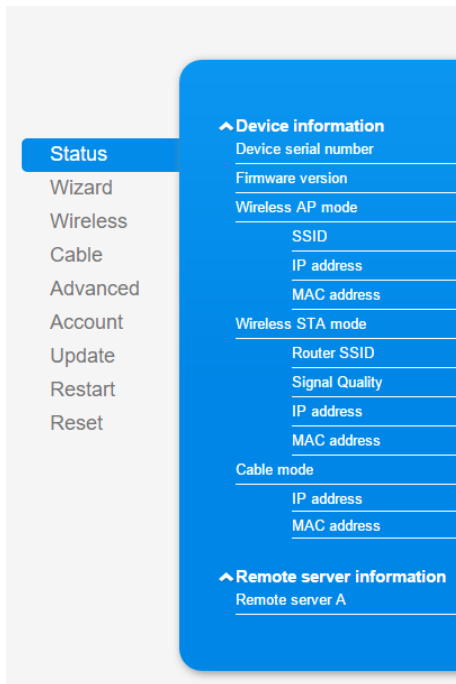

Ga naar **status** zoals hiernaast afgebeeld. Klik vervolgens op **Remote server information**. Wanneer hier achter staat: **Pingable**. Dan betekent dit dat uw omvormer te benaderen is.

**Vanaf nu zou u weer uw gegevens kunnen bekijken via uw persoonlijke portal!**

[www.solax.portal.com](http://www.solax.portal.com)



**BespaarPartner B.V.**

Roomweg 5  
8334NR Tuk  
0521-764012  
info@bespaarpartner.nl  
www.bespaarpartner.nl