


FU 350/355/360 M Silk[®] Plus Silver PERC MBB half-cut cells

PERFORMANCE GUARANTEE

Max power decrease from 2nd year 0.5%/year
97% at the end of first year
90% at the end of 20th year
87% at the end of 25th year

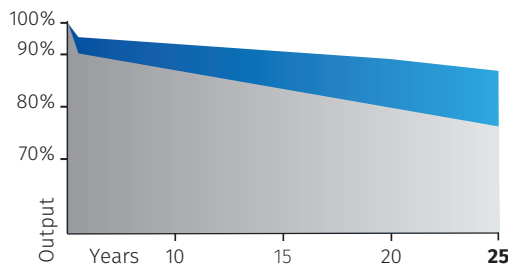

■ Market standard performances
■ FuturaSun performances



350 - 360 Wp

**POWER
RANGE**

-0.35 %/°C

**TEMPERATURE
COEFFICIENT**



**108 HALF-CUT
MBB CELLS**

GENERAL FEATURES & KEY BENEFITS



- 25-year performance guarantee & 15-year product warranty
- Particularly suitable for Building Integrated Photovoltaics (BIPV)



RAL 7043

- Silver coloured glass and frame for special architectural requirements (similar to RAL 7043)*



- For buildings of high aesthetical value and for areas subject to landscape constraints



- Less shades and more reflected light to the cell thanks to the round ribbon



- 2 independent section design secures a higher energy yield under shaded conditions

- Long cable as standard suitable for landscape configurations




For detailed information,
please refer to the installation manual



MECHANICAL SPECIFICATIONS

Dimensions	1722 x 1134 x 30 mm
Weight	20.8 kg
Glass	Silver colour, tempered, thickness, 3.2 mm
Cells	108 monocrystalline half cut MBB PERC cells 182 x 91 mm
Frame	Aluminium frame with mounting and drainage holes
Junction boxes	Certified according to IEC 62790, IP 68 approved, 3 bypass diodes
Cables	Solar cable, length 1100 mm or customized assembled with MC4-compatible plugs
Maximum reverse current (Ir)	25 A
Maximum system voltage	1000 V (1500 V on request)
Mechanical load (snow)	Design load: 3600 Pa 5400 Pa (including safety factor 1.5)
Mechanical load (wind)	Design load: 1600 Pa 2400 Pa (including safety factor 1.5)
Protection Class	II - accordance to IEC 61730

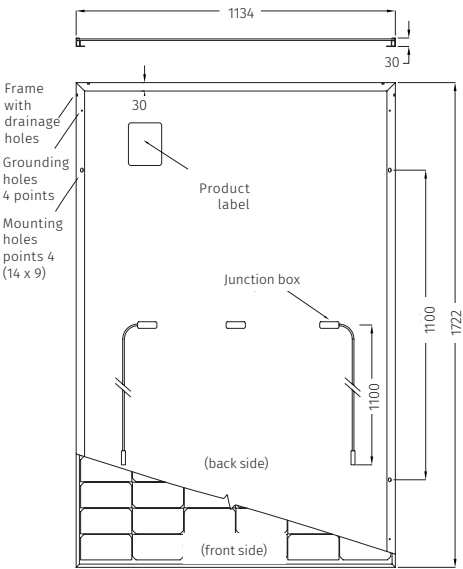

Note: dimensions in mm, tolerance +/- 2 mm

ELECTRICAL DATA - STC*

		FU 350 M	FU 355 M	FU 360 M
Module power (Pmax)	W	350	355	360
Open circuit voltage (Voc)	V	37.01	37.20	37.34
Short circuit current (Isc)	A	11.89	12.02	12.15
Maximum power voltage (Vmpp)	V	30.72	30.88	30.99
Maximum power current (Impp)	A	11.40	11.50	11.62
Module efficiency	%	17.93%	18.18%	18.44%

ELECTRICAL DATA - NMOT**

		FU 350 M	FU 355 M	FU 360 M
Module power (Pmax)	W	265	269	272
Open circuit voltage (Voc)	V	34.91	35.10	35.25
Short circuit voltage (Isc)	A	9.36	9.47	9.57
Maximum power voltage (Vmpp)	V	28.77	28.92	29.02
Maximum power current (Impp)	A	9.20	9.29	9.38

TEMPERATURE RATINGS

Temperature coefficient Isc	%/°C	0.05
Temperature coefficient Voc	%/°C	-0.28
Temperature coefficient Pmax	%/°C	-0.35
NMOT**	°C	45
Operating temperature	°C	from -40 to +85

PACKAGING INFORMATION

Quantity / Pallet	36 pcs
Container 40' HQ	936 pcs / 26 pallets

*Standard Test Conditions STC: 1000 W/m² - AM 1.5 - 25 °C - tolerance: Pmax (±3%). Voc (±4%). Isc (±5%)

**Nominal Module Operating Temperature NMOT: 800 W/m2 - T=45 °C - AM 1.5

Notice: All data and specifications are preliminary and subject to change without notice.



Riva del Pasubio, 14 35013 Cittadella Italy
Tel + 39 049 5979802 info@futurasun.it
www.futurasun.com



2023_108m_340-355_Silk_PPlus_Silver_EN_Rev06